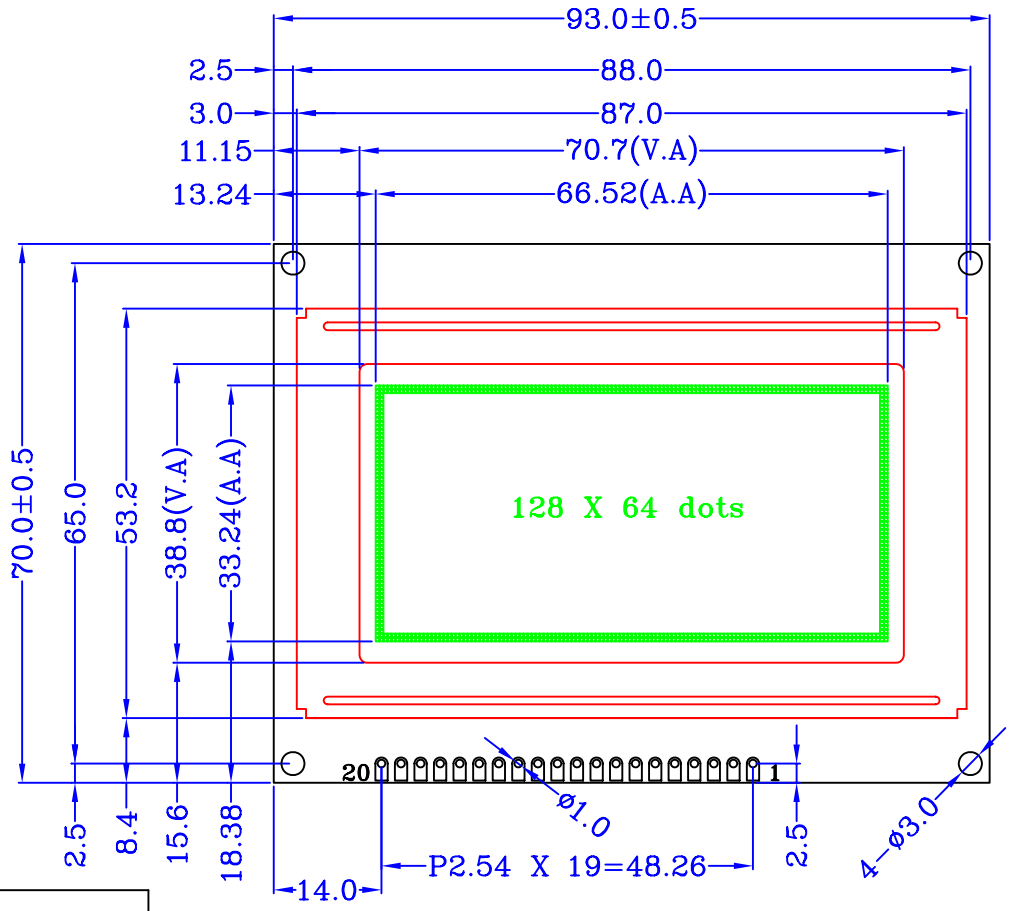

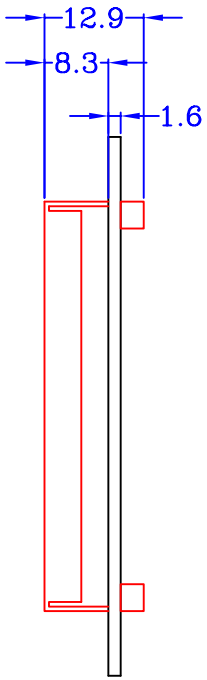

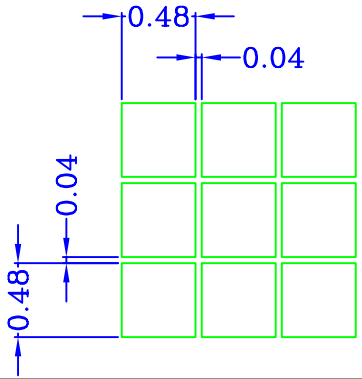

1	VSS	Power ground
2	VDD	Power supply (+5V)
3	VO	Contrast adjust
4	RS	Register select
5	R/W	H: Read; L: Write
6	E	Enable signal
7	DB0	DATA BUS 0
8	DB1	DATA BUS 1
9	DB2	DATA BUS 2
10	DB3	DATA BUS 3
11	DB4	DATA BUS 4
12	DB5	DATA BUS 5
13	DB6	DATA BUS 6
14	DB7	DATA BUS 7
15	/CS1	Chip select for IC1. L active
16	/CS2	Chip select for IC2. L active
17	/RST	Reset signal
18	VEE	Negative power output
19	A	Backlight (+) +5V
20	K	Backlight (-)

NOTES:

1. DISPLAY TYPE: STN,YELLOW-GREEN
2. POLARIZER TYPE: TRANSFLECTIVE,POSITIVE
3. VIEW DIRECTION: 6:00
4. OPREATING TEMPERATURE: -20°C~+70°C
5. STORAGE TEMPERATURE: -30°C~+80°C
6. VDD: +5V
7. DRIVE METHOD: 1/64DUTY,1/9BIAS
8. CONTROLLER: SBN0064 OR EQUIVALENT
9. BACKLIGHT TYPE: YELLOW-GREEN
10. BACKLIGHT SUPPLY VOLTAGE: +5.0V
11. VOP: TBD

WAYING (HONGKONG) SHARES LIMITED

DESIGN:	MODEL NUMBER: WYM12864D	UNITS: MM
CHECK:		VERSION: B
APPOVE:		SHEET: 1 OF 1
Unspecified tolerences are ±0.3		DATE: 2008-04-03