

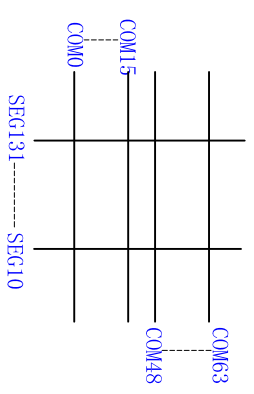


1	VSS	电源-
2	VDD	电源+3.3V
3	NC	空
4	SCI	液晶SPI数据
5	SCL	液晶SPI时钟
6	A0	数据/指令寄存器选择
7	/RES	液晶复位
8	/CS1	液晶片选
9	A	背光 (+) +3.3V
10	K	背光 (-)

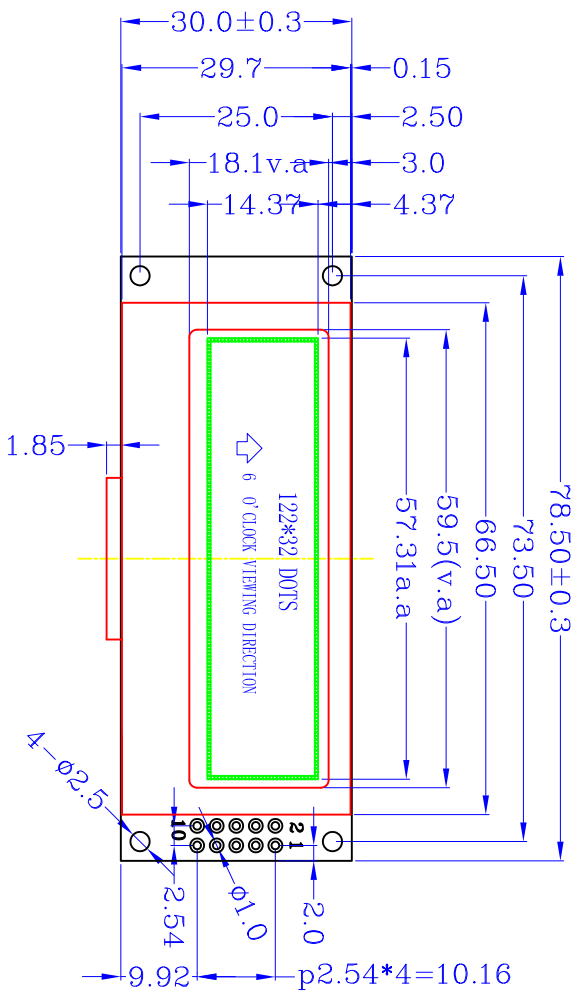

- NOTES:
1. DISPLAY TYPE: STN, YELLOW-GREEN
  2. POLARIZER TYPE: TRANSPARENT, POSITIVE
  3. VIEW DIRECTION: 6:00
  4. OPERATING TEMPERATURE: -10°C~+60°C
  5. STORAGE TEMPERATURE: -20°C~+70°C
  6. VDD: +3.3V
  7. DRIVE METHOD: 1/64DUTY, 1/9BIAS
  8. CONTROLLER: ST7567
  9. BACKLIGHT TYPE: GREEN
  10. BACKLIGHT SUPPLY VOLTAGE: +3.3V

		<b>WAYING (HONGKONG) SHARES LIMITED</b>	
DESIGN:	MODEL NUMBER:	UNITS:	MM
CHECK:	WYM12232K1	VERSION:	A
APPROVE:		SHEET:	1 OF 1
Unspecified tolerances are ±0.3			DATE: 2012-01-08